

## INFRARED EMITTING DIODE

- **Descriptions:**

AT225-12-60 is an infrared 850 nm emitting diode with high radiant power and high speed, molded in a clear plastic package .


- **Features:**

1. Package type: leaded.
2. Peak wavelength:  $\lambda_p = 850\text{nm}$ .
3. High radiant intensity.
4. Angle of half intensity  $\theta_{1/2} = \pm 15^\circ$ .
5. Low forward voltage.
6. Suitable for high pulse current operation.
7. High modulation bandwidth.
8. Good spectral matching to Si photodetectors.
9. Lead (Pb)-Free component in accordance with RoHS.

- **Applications:**

1. Free air transmission system.
2. Security System.
3. Infrared applied system
4. Night viewing.

- **Internal Circuit:**

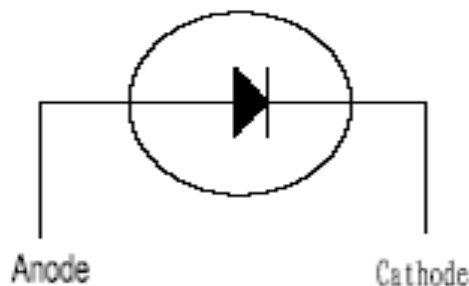

● **Absolute Maximum Ratings:**

Tamb=25,unless otherwise specified

Parameter	Test condition	Symbol	Ratings	Unit
Continuous Forward Current		IF	50	mA
Power Dissipation		PD	120	mW
Peak Forward Current	tp/T=0.5,tp=100μs	IFP	350	mA
Reverse voltage		VR	5	V
Operating Temperature		Topr	-40~+85	℃
Storage Temperature		Tstg	-40~+100	℃
Soldering Temperature		Tsol	260℃ for 6 sec Max (2mm from Body)	

● **Basic Characteristics**

Tamb=25,unless otherwise specified

Parameter	Symbol	Min.	Type	Max.	Unit	Test Condition
Radiant Intensity	Ee	60		78	mW/sr	IF=50mA
Forward Voltage	VF	1.4		1.6	V	IF=50mA
Reverse Current	IR			10	μA	VR=5V
Peak Wavelength	λp	840	850	860		IF=20mA
Spectral Line Half-Width	Δλ		40		nm	IF=20mA
View Angle	2θ1/2		30		deg	IF=20mA

● **Typical Characteristics**

Tamb = 25 °C, unless otherwise specified

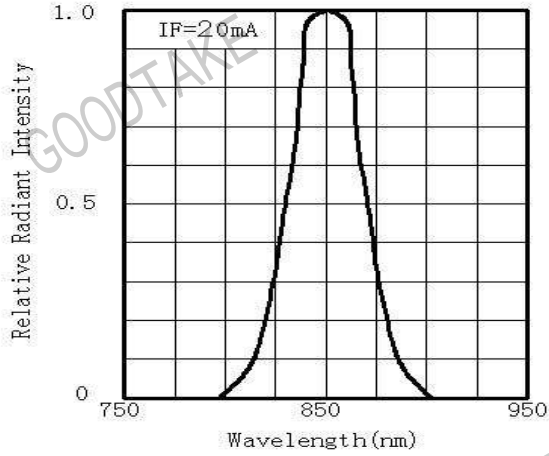


Fig.1 Spectral Distribution

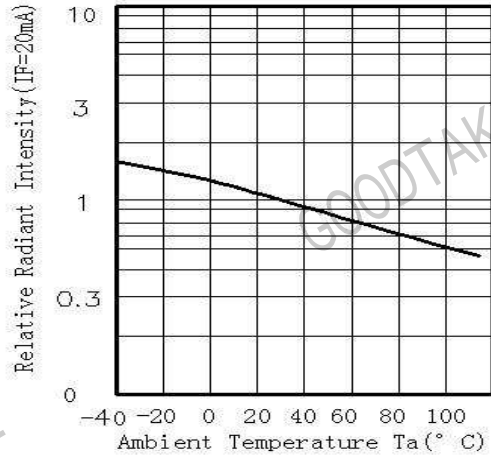


Fig.2 Relative Radiant Intensity Vs Ambient Temperature Ta(°C)

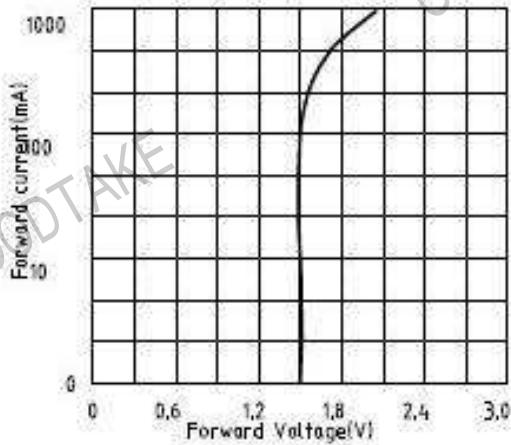


Fig.3 Forward Current Vs Forward Voltage

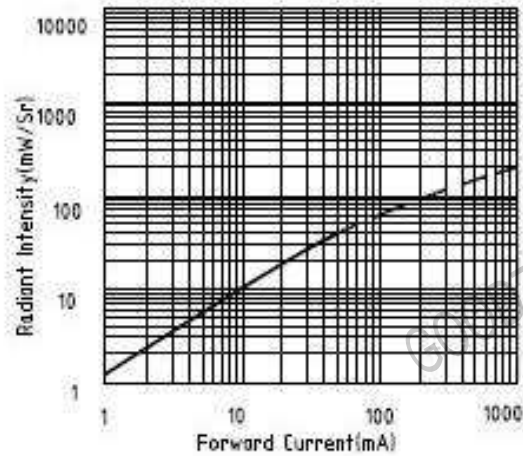


Fig.4 Forward Current Vs Radiant Intensity


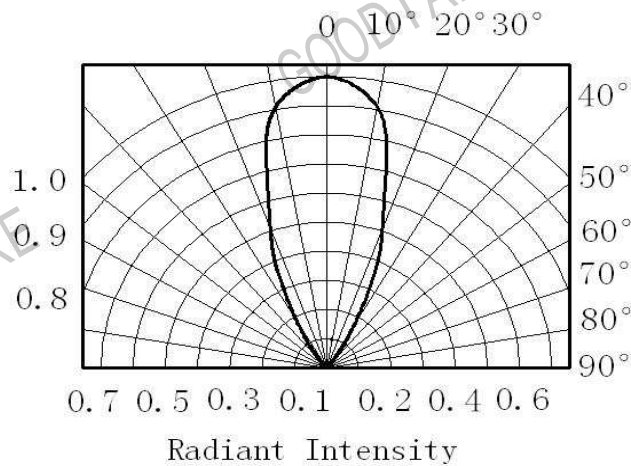


Fig.5 Angle Vs Radiant Intensity

● **Dimensions:**

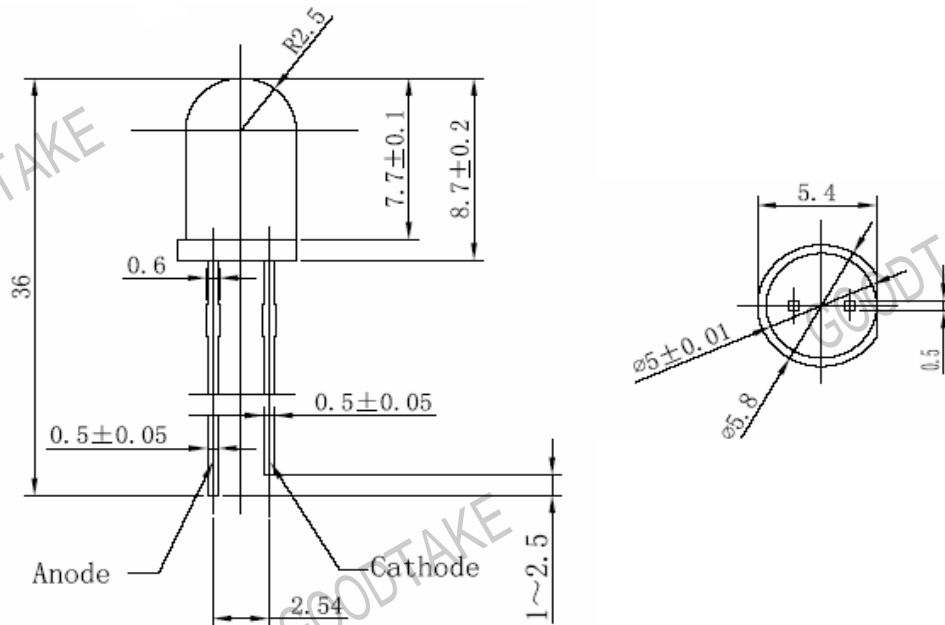

**NOTE:** 1. All dimensions are in millimeter, tolerance is ±0.25 unless otherwise noted.  
 2. Epoxy meniscus extends ≤1 mm down to the lead is allowed.

● **Reliability Test Items And Conditions:**

NO	Item	Test Conditions	Test Hours/Cycle	Sample Quantity	Test Result
1	Solder Heat	TEMP: 270°C ± 3°C	10 SEC	11 pcs	0 DEFECT
2	Temperature Cycle	H: +85°C 60min ↓ 10min L: -25°C 60min	16 cycles	22 pcs	0 DEFECT
3	Thermal Shock	H: +85°C 30min ↑ 30sec L: -25°C 30min	10 cycles	11 pcs	0 DEFECT
4	High Temperature Storage	TEMP: +85°C	1000 HRS	22 pcs	0 DEFECT
5	Low Temperature Storage	TEMP: -25°C	1000 HRS	22 pcs	0 DEFECT
6	High Temperature High Humidity Storage	85°C/93% RH	1000HRS	22 pcs	0 DEFECT